


Individual Device Temperature Control

ABTS-LiTM

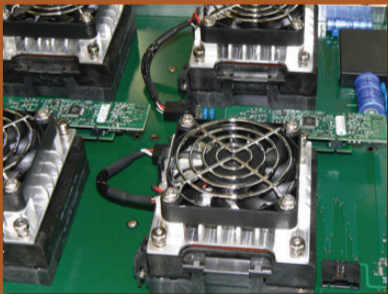

High Power Burn-In

- ◆ 36 KW chamber dissipation
- ◆ Over 100W per device

Low Cost of Ownership

- ◆ Higher DUT capacity
- ◆ Small footprint

High Reliability and Uptime

- ◆ Redundant power supply architecture
- ◆ Hot-swap electronics and power supplies